








Fitting Vertical Blinds

Parts supplied as standard


<p>1. Headrail with Chain and Cord Controls</p> 	<p>5. Tie Down Clip</p> 
<p>2. Pack of louvers with Pre-attached Bottom Weights</p> 	<p>6. Pack of fascia clips (OPTIONAL)</p> 
<p>3. Bottom Chains</p> 	
<p>4. Fixing Brackets A. Face Fix Brackets B. Top Fix Brackets</p> 	<p>7. Fascia (OPTIONAL)</p> 

1. Fitting the valance clips (optional)

Prior to fitting the headrail, install the valance onto it. In case of inside recess, the valance will be impossible to fit once the headrail in place.

Simply clip one bracket at each end of the valance as shown in the picture and space evenly the remaining brackets between the first two.

Once the valance brackets are clipped onto the headrail, follow the instructions for fitting the headrail against the window.

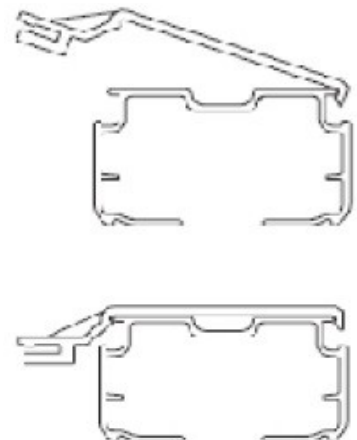

Fitting Vertical Blinds

2. Fitting the headrail

According to the mounting position you have decided on, face fix or top fix brackets will be supplied.

2a. Face Fix for fitting against the wall


A type brackets will be supplied. Screw the brackets into position at equal distances from the end of the headrail.

A. Tilt and place the headrail inside the brackets ensuring that it is secured.


B. Push it vertically and screw it in at the front.

Notice: we recommend that the distance from between the brackets does not exceed 600mm.

For standard headrail

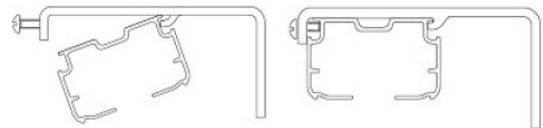

For headrail with valance

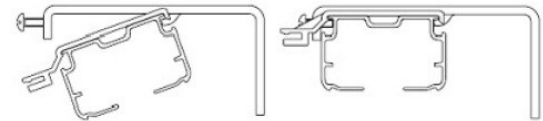


2b. Top Fix for fitting to the ceiling


B type brackets will be supplied. Position the brackets to the ceiling keeping at least a 50mm distance from the window handle enabling the louvers to hang freely. Place the brackets at equal distances of at most 600mm apart.

Tilt the headrail and hook it on the front of the brackets. Press the headrail back to click into position and push the tab to release it.

For standard headrail

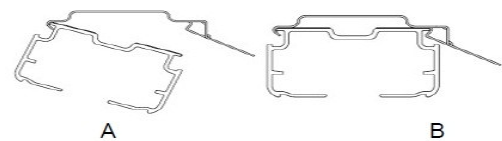

For headrail with valance

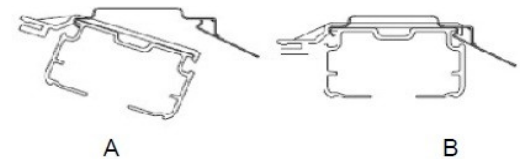


Fitting Vertical Blinds

3. Fitting the Valance

Align the valance with the headrail in such a way that the valance is at the same level as the clips.


Press the valance to the headrail clicking every clip of the headrail into the valance.

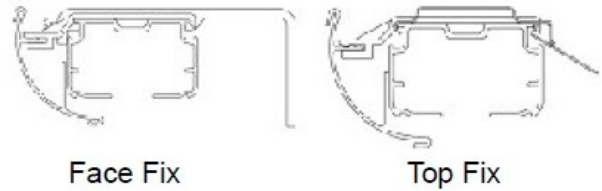

4. Fitting the Tie Down Clip

Position the tie down cleat against the wall so as to completely stretch the chain. Secure the chain around the device making sure it does not hang freely. Screw the tie down cleat into place.

Both the chain and the cord can be ran through the Tie Down Clip.



Operating Vertical Blinds

Use the chain controls to tilt the louvers and the cord controls to open and close the blind.

