


Fitting Vertical Blinds

Supplied Parts

Headrail With Control Cord and Chain



Pack of Louvers



Fixing Brackets
A. Face fix B. Top Fix



Child Safety P Cleat



Fitting The Blind

Depending on the type of mounting selected, you will be provided with either type A or B brackets.


A. Face Fix (for fitting against the wall)

A type brackets will be supplied. Screw the brackets into position at equal distances from the end of the headrail.

A. Tilt and place the headrail inside the brackets ensuring that it is secured.

B. Push it vertically and screw it in at the front.


Note: we recommend that the distance from between the brackets does not exceed 600mm.

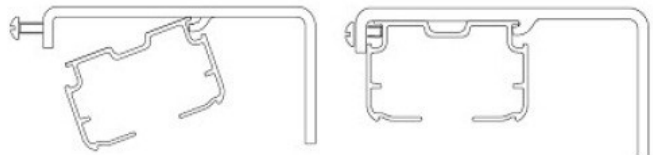

B. Top Fix for fitting to the ceiling

B type brackets will be supplied. Position the brackets to the ceiling keeping at least a 50mm distance from the window handle enabling the louvers to hang freely. Place the brackets at equal distances of at most 600mm apart.

Tilt the headrail and hook it on the front of the brackets. Press the headrail back to click into position.

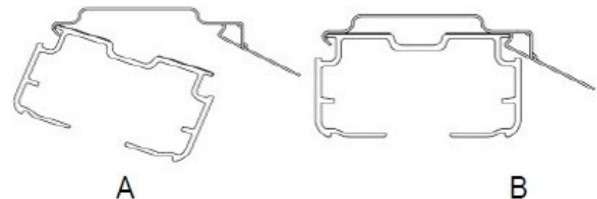

Child Safety

Position the tie down cleat against the wall so as to completely stretch the chain. Secure the chain around the device making sure it does not hang freely. Screw the tie down cleat into place.

Both the chain and the cord can be ran through the P Cleat.

