


Fitting Guidelines for Wood Blinds

Notice: Please read the following guidelines regarding the fitting and operation of wood blinds carefully as we do not accept any claims for items that have not been installed and operated properly. Please be advised that wood blinds show variations in colour, grain and tone.

1. FITTING THE BLIND

Decide on the position of the blind taking account of any obstructions in the way i.e. handles.

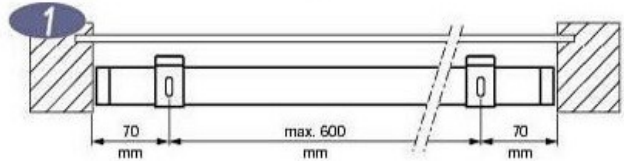


2a. FITTING THE BRACKETS

Position the brackets against the fitting surface at a distance of maximum 600mm apart and mark their place. Mount the remaining brackets at equal distances along the headrail of the blind.

2b. FITTING THE END BRACKETS AND CENTRE SUPPORTS

End brackets and centre supports are provided for blinds over 1400mm in width and help install the blind inside or outside the recess.


These also can be used to fit the window shade top, face or side ways, as required.

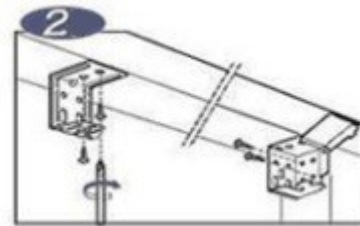

3. MOUNTING OPTIONS

3a. EXTENSION BRACKETS

Extension brackets need to be ordered for blinds exceeding 700mm in width as all brackets must be mounted at a top distance of 600mm apart.

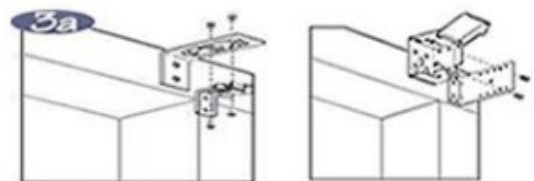

3b. RECESS POCKET BRACKETS

Optional brackets in case of limited space for fitting. The headrail is positioned inside the open brackets.




Fitting Guidelines for Wood Blinds

4. FITTING THE HEADRAIL

Position the headrail inside the open brackets, using a second person to help place it in case of larger blinds.


Close the clips of the brackets to secure the headrail in place.

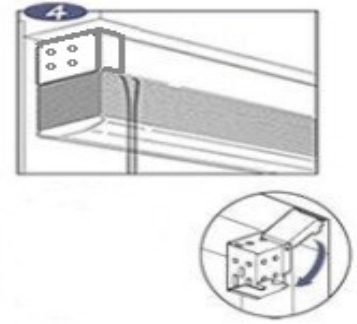

5. MOUNTING POSITION


5a. INSIDE THE RECESS

Hang the valance over the top rail, aligning its clips with those of the valance. Click the valance and headrail together.

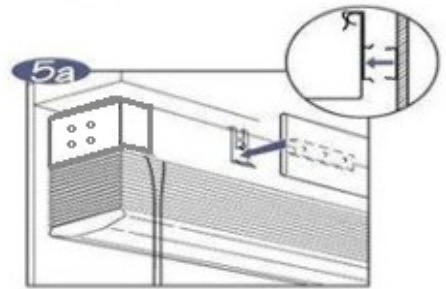

5b. OUTSIDE THE RECESS


Secure the corners as shown in the picture. Align the clips of the headrail with those of the valance and click them together.

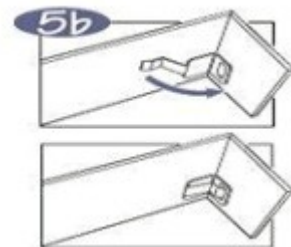

6. HOLD DOWN BRACKETS

Compatible with both inside and outside recess fitting, the hold down brackets must be installed on either side of the bottom rail to prevent it from moving.

Notice: To raise the blind, release the hold down brackets first.

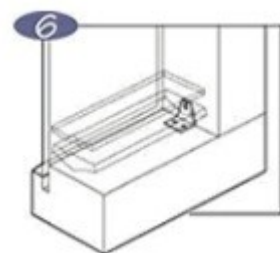


Operating Guidelines for Wood Blinds

7. OPERATING INSTRUCTIONS

7a. LOWERING THE BLIND


Pull the cord diagonally towards the centre of the blind to release the cord lock. Lower the blind to the desired position maintaining the direction of the cord.

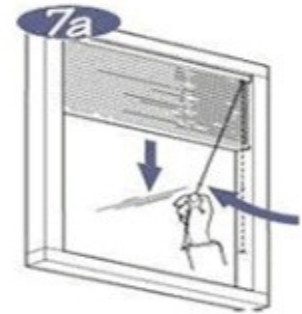

7b. RAISING THE BLIND


Pull the cord vertically to raise the blind to the desired position.

Notice: all slats must be tilted horizontally prior to raising.

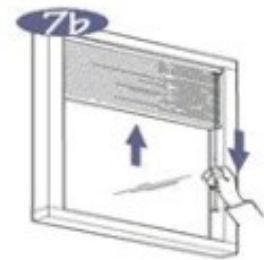


8. REMOVING THE BLIND

Remove the valance by carefully tilting the top of the valance and pulling it diagonally towards you.

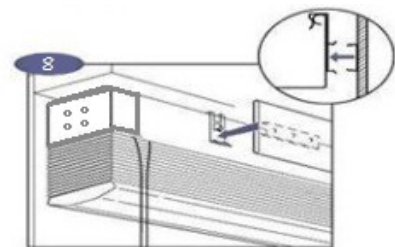

9. UNLOCKING THE BRACKETS

Unlock the brackets by opening the clips and lift the blind out, supporting it at the same time.

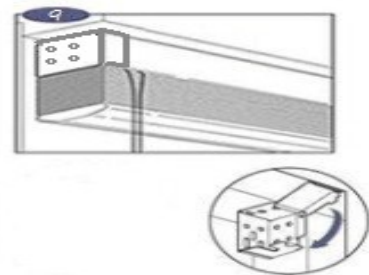

10. CLEANING THE BLIND

In most cases dusting the slats with a feather duster or a vacuuming them on a low level is enough. In case of stains and dirt, wipe the slats using a soft and slightly damp cloth. We can not be held responsible when using other cleaning methods that results in the damaging of the blind.